


CPE

ELECTRIC BOILER, ELECTRO MECHANIC, ONLY HEATING

Features

- Large capacity boiler (45 litres).
- Stainless steel shielded heating elements INCOLOY800.
- Three heat outputs.
- Expansion vessel and circulating pump not included.
- Control thermostat from 0 °C to 90 °C.
- Temperature limiter 100 °C.
- Thermometer from 0 °C to 120 °C.
- Hydrometer from 0 to 4 kg/cm2.
- Safety valve calibrated to 3 kg/cm2.
- Flow detector.
- Auto air vent.
- Safety pressostat 0.5 kg/cm2.
- General switch.
- Switch with or without programmer.
- Electrical panel included.
- Control fuse.
- Powder coated RAL 9010 steel structure.
- Daily programmer.
- Weekly programmer as an option.
- Ambient thermostat leads.
- Compatible with Ambient Thermostats TA3, CPT10 and X2D available as accessory.
- Compatible with standard power managers (RG90, GReyder) offered as accessory.

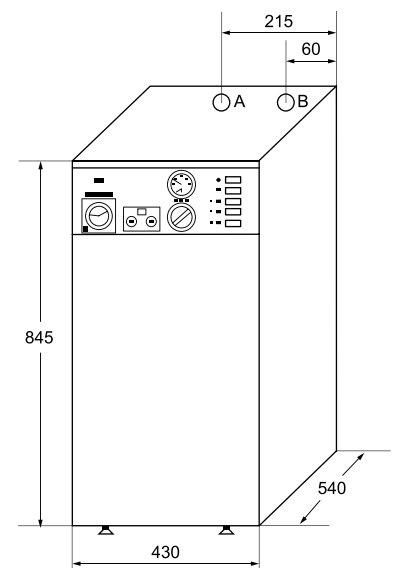

A heat supply
B heat return

Códigos EAN

CPE24	8432336805004	CPE42	8432336805301
CPE27	8432336805059	CPE45	8432336805356
CPE30	8432336805103	CPE48	8432336805400
CPE33	8432336805158	CPE51	8432336805455
CPE36	8432336805202	CPE54	8432336805509
CPE39	8432336805257		

		CPE24	CPE27	CPE30	CPE33	CPE36	CPE39	CPE42	CPE45	CPE48	CPE51	CPE54
Output	kW	24	27	30	33	36	39	42	45	48	51	54
	kcal/h	20640	23220	25800	28380	30960	33540	36120	38700	41280	43860	46440
Voltage	3x400 V+N~	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
Frecuency	Hz	50	50	50	50	50	50	50	50	50	50	50
Insulation		Class I	Class I	Class I	Class I	Class I	Class I	Class I	Class I	Class I	Class I	Class I
IP degree		IP25	IP25	IP25	IP25	IP25	IP25	IP25	IP25	IP25	IP25	IP25
Colour		White	White	White	White	White	White	White	White	White	White	White
Aprovals		CE	CE	CE	CE	CE	CE	CE	CE	CE	CE	CE
Weight	kg	69	69	69	69	69	69	69	69	69	69	69
Dimensions including packaging	cm	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6	60x92x49.6
Gross Weight	kg	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
Water connections	inches	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"